

Supersedes ISO TC184/SC4/WG10 N238

ISO/PDTS 10303-1008

Product data representation and exchange: Application module: Layer assignment

COPYRIGHT NOTICE:

This ISO document is a draft technical specification and is copyright protected by ISO. While the reproduction of draft technical specifications in any form for use by Participants in the ISO standards development process is permitted without prior permission from ISO, neither this document nor any extract from it may be reproduced, stored or transmitted in any form for any other purpose without prior written permission from ISO.

Requests for permission to reproduce this document for the purposes of selling it should be addressed as shown below (via the ISO TC 184/SC4 Secretariat's member body) or to ISO's member body in the country of the requester.

Copyright Manager
ANSI
11 West 42nd Street
New York, New York 10036
USA
phone: +1-212-642-4900
fax: +1-212-398-0023

Reproduction for sales purposes may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

ABSTRACT:

This document is a draft of the proposed application module for the assignment of representation items to layers. This application module defines a layer as a general structure for collection of items, but it does not specify any semantics associated with the use of layers.

KEYWORDS:

Application module, layer.

COMMENTS TO READER:

This document has been reviewed and noted by the ISO TC 184/SC4 Quality Committee and SC4 Secretariat and has been determined to be ready for this ballot cycle.

Project Leader: Rogerio Barra
ATI/PDES, Inc.

Address: 5300 International Boulevard
North Charleston SC 29418
USA

Telephone: (843) 760-3378

Telefacsimile: (843) 760-3349

Electronic mail: barra@aticorp.org

Project Editor: Darla Nettles

Arthur D. Little, Inc.

Address: 5300 International Boulevard
North Charleston SC 29418
USA

Telephone: (843) 760-3232

Telefacsimile: (843) 760-3349

Electronic mail: nettles@aticorp.org

Contents	Page
1 Scope.....	1
2 Normative references	1
3 Terms, definitions, and abbreviations	2
3.1 Terms defined in ISO 10303-1	2
3.2 Terms defined in ISO 10303-46	2
3.3 Terms defined in ISO 10303-202	3
3.4 Terms defined in ISO 10303-1001	3
3.5 Abbreviations	3
4 Information requirements.....	3
4.1 Units of functionality.....	3
4.2 Required AM ARMs	4
4.3 ARM entity definitions.....	4
5 Module interpreted model.....	5
5.1 Mapping specification	5
5.2 MIM EXPRESS short listing.....	8
Annex A (normative) MIM short names.....	9
Annex B (normative) Information object registration	10
Annex C (informative) ARM EXPRESS-G.....	11
Annex D (informative) MIM EXPRESS-G	13
Annex E (informative) AM ARM and MIM EXPRESS	16
Bibliography	17
Index	18

Figures

Figure C.1 - ARM EXPRESS-G diagram 1 of 1	12
Figure D.1 - MIM EXPRESS-G diagram 1 of 2.....	14
Figure D.2 - MIM EXPRESS-G diagram 2 of 2.....	15

Tables

Table 1 - Mapping table for layer_assignment UoF	7
--	---

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

In other circumstances, particularly when there is an urgent market requirement for such documents, a technical committee may decide to publish other types of normative document:

— an ISO Publicly Available Specification (ISO/PAS) represents an agreement between technical experts in an ISO working group and is accepted for publication if it is approved by more than 50% of the members of the parent committee casting a vote;

— an ISO Technical Specification (ISO/TS) represents an agreement between the members of a technical committee and is accepted for publication if it is approved by 2/3 of the members of the committee casting a vote.

An ISO/PAS or ISO/TS is reviewed every three years with a view to deciding whether it can be transformed into an International Standard.

ISO/PDTS 10303-1008 was prepared by Technical Committee ISO/TC 184, Industrial automation systems and integration, Subcommittee SC4, Industrial data.

This International Standard is organized as a series of parts, each published separately. The parts of ISO 10303 fall into one of the following series: description methods, integrated resources, application interpreted constructs, application modules, application protocols, abstract test suites, implementation methods, and conformance testing. The series are described in ISO 10303-1. A complete list of parts of ISO 10303 is available from Internet:

<<http://www.nist.gov/sc4/editing/step/titles/>>.

Annexes A and B form an integral part of this part of ISO 10303. Annexes C, D and E are for information only.

Introduction

ISO 10303 is an International Standard for the computer-interpretable representation and exchange of product data. The objective is to provide a neutral mechanism capable of describing product data throughout the life cycle of a product, independent from any particular system. The nature of this description makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and archiving.

This International Standard is organized as a series of parts, each published separately. The parts of ISO 10303 fall into one of the following series: description methods, integrated resources, application interpreted constructs, application protocols, application modules, abstract test suites, implementation methods, and conformance testing. The series are described in ISO 10303-1. This part of ISO 10303 is a member of the application module series.

This part of ISO 10303 specifies an application module for the collection of product data elements into layers. It provides for the assignment of representation items to layers and the identification of layers, but does not include generic grouping mechanisms. Whereas this application module specifies the structure for layer assignment, any semantics associated with the use of layers is out of scope.

EXAMPLE - CAD systems may collect all instances of a given geometric type into a layer, or might use layers to distinguish constructive elements, such as a center line, from geometric elements that are part of shape definition.

For an example of bringing together a set of application modules to provide the capability to assign shape elements to layers and visual attributes, such as colours and curve fonts, to geometric and topological elements, see Annex F of ISO 10303-1009.

Industrial automation systems and integration — Product data representation and exchange — Part 1008: Application module: Layer assignment

1 Scope

This part of ISO 10303 specifies the application module for the collection of product data elements into layers.

The following are within scope of this part of ISO 10303:

- assignment of representation items to layers;
- identification of layers.

The following are outside the scope of this part of ISO 10303:

- generic grouping mechanisms;
- specification of semantics associated with the use of layers.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 8824-1:1994, *Information technology — Open systems interconnection — Abstract syntax notation one (ASN.1) — Part 1: Specification of basic notation*.

ISO 10303-1:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 1: Overview and fundamental principles*.

ISO 10303-11:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 11: Description methods: The EXPRESS language reference manual*.

ISO 10303-46:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 46: Integrated generic resources: Visual presentation.*

ISO 10303-202:1996, *Industrial automation systems and integration — Product data representation and exchange — Part 202: Application protocol: Associative draughting.*

ISO 10303-1001:¹ *Industrial automation systems and integration — Product data representation and exchange — Part 1001: Application module: Appearance assignment.*

ISO 10303-1006:¹ *Industrial automation systems and integration — Product data representation and exchange — Part 1006: Application module: Foundation representation.*

3 Terms, definitions, and abbreviations

3.1 Terms defined in ISO 10303-1

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-1 apply:

- application;
- application object;
- application protocol;
- application reference model;
- data;
- information;
- integrated resource;
- product;
- product data
- unit of functionality.

3.2 Terms defined in ISO 10303-46

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-46 apply:

- layer.

¹⁾ To be published

3.3 Terms defined in ISO 10303-202

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-202 apply:

— application interpreted construct.

3.4 Terms defined in ISO 10303-1001

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-1001 apply:

— application module.

3.5 Abbreviations

For the purposes of this part of ISO 10303, the following abbreviations apply:

AM	application module
ARM	application reference model
MIM	module integrated model
UoF	unit of functionality
URL	uniform resource locator

4 Information requirements

This clause specifies the information requirements for the layer assignment module. The information requirements are specified as a set of units of functionality and application objects. The information requirements are defined using the terminology of the subject area of this application module.

NOTE 1 - A graphical representation of the information requirements is given in annex C.

NOTE 2 - The mapping specification is specified in 5.1 which shows how the information requirements are met using the integrated resources of this International Standard. The use of the integrated resources introduces additional requirements which are common to application modules and protocols.

EXPRESS specification:

```
* )  
SCHEMA layer_assignment_arm;  
( *
```

4.1 Units of functionality

This subclause specifies the units of functionality (UoF) for this part of ISO 10303 as well as any support elements needed for the application module definition. This part of ISO 10303 specifies the following units of functionality:

— layer_assignment.

This part of ISO 10303 uses the following units of functionality (see ISO 10303-1006):

— foundation_representation.

The units of functionality and a description of the functions that each UoF supports are given below. The application elements included in the UoFs are defined in 4.3.

4.1.1 Layer_assignment

This UoF specifies information for the collection of representation items into layers. The following application elements are specified in the layer_assignment UoF:

— Layer.

4.1.2 Foundation_representation

This UoF is specified in ISO 10303-1006. The following application elements from this UoF are referenced from this part of ISO 10303:

— Representation_item.

4.2 Required AM ARMs

The following EXPRESS interface statements specify the application elements imported from the ARMs of other application modules.

EXPRESS specification:

```
* )
USE FROM foundation_representation_arm; -- ISO 10303-1006
( *
```

NOTE - The arm referenced above can be found in the following part of ISO 10303:

foundation_representation_arm	ISO 10303-1006
-------------------------------	----------------

4.3 ARM entity definitions

This subclause specifies the application entities for this part of ISO 10303. Each application entity is an atomic element that embodies a unique application concept and contains attributes specifying the data elements of the entity. The application entities and their definitions are given below.

4.3.1 Layer

A **Layer** is a general structure for collection of representation items. Layers shall not be nested, i.e., a layer cannot be contained in another layer.

EXPRESS specification:

```

* )
ENTITY layer;
    description:STRING;
    id:STRING;
    layered_elements: SET [1:?] OF representation_item;
END_ENTITY;
( *

```

Attribute definitions:

description: specifies additional information about the layer;

id: specifies the layer identifier;

layered_elements: specifies the set of representation items assigned to a layer.

EXPRESS specification:

```

* )
END_SCHEMA;
( *

```

5 Module interpreted model

5.1 Mapping specification

This clause contains the mapping table that shows how each UoF and application element of this part of ISO 10303 (see clause 4) maps to one or several MIM resource constructs. The mapping table is organized in five columns. The contents of these five columns are:

Column 1) Application element: Name of an application element as it appears in the application entity definition. Application entity names are written in uppercase. Attribute names are listed after the application entity to which they belong and are written in lower case.

Column 2) MIM element: Name of an MIM element as it appears in the MIM, the term 'IDENTICAL MAPPING', or the term 'PATH'. MIM entities are written in lower case. Attribute names of MIM entities are referred to as <entity name>.<attribute name>. The mapping of an application element may result in several related MIM elements. Each of these MIM elements will require a line of its own in the table. The term 'IDENTICAL MAPPING' indicates that both application entities of an application assertion map to the same MIM element. The term 'PATH' indicates that the application assertion maps to the entire reference path.

Column 3) Source: For those MIM elements that are interpreted from the integrated resources, this is the number of the corresponding part of ISO 10303. For those MIM elements that are created for the purpose of this part of ISO 10303, this is the number of this part.

Column 4) Rules: One or more numbers may be given which refer to rules that apply to the current MIM element or reference path. For rules that are derived from relationships between application

entities, the same rule is referred to by the mapping entries of all the involved MIM elements. The expanded names of the rules are listed after the table.

Column 5) Reference path: To describe fully the mapping of an application entity, it may be necessary to specify a reference path through several related MIM elements. The reference path column documents the role of a MIM element relative to the MIM element in the row succeeding it. Two or more such related MIM elements define the interpretation of the integrated resources that satisfies the requirement specified by the application entity. For each MIM element that has been created for use within this part of ISO 10303, a reference path up to its supertype from an integrated resource is specified.

For the expression of reference paths and the relationships between MIM elements, the following notational conventions apply:

- a) [] : multiple MIM elements or sections of the reference path are required to satisfy an information requirement;
- b) () : multiple MIM elements or sections of the reference path are identified as alternatives within the mapping to satisfy an information requirement;
- c) {} : enclosed section constrains the reference path to satisfy an information requirement;
- d) -> : attribute references the entity or select type given in the following row;
- e) <- : entity or select type is referenced by the attribute in the following row;
- f) [i] : attribute is an aggregation of which a single member is given in the following row;
- g) [n] : attribute is an aggregation of which member n is given in the following row;
- h) => : entity is a supertype of the entity given in the following row;
- i) <= : entity is a subtype of the entity given in the following row;
- j) = : the string, select or enumeration type is constrained to a choice or value;
- k) \ : the line continuation for strings that wrap.

Table 1 - Mapping table for layer_assignment UoF

Application element	AIM element	Source	Rules	Reference path
Layer	presentation_layer_assignment	46		
description	presentation_layer_assignment.description	46		
id	presentation_layer_assignment.id	46		
layered_elements	PATH			presentation_layer_assignment presentation_layer_assignment.assigned_items[i]-> representation_item

5.2 MIM EXPRESS short listing

This clause specifies the EXPRESS schema that uses elements from the integrated resources, application interpreted constructs or application module MIMs and contains the types, entity specializations, rules, and functions that are specific to this part of ISO 10303. This clause also specifies modifications to the textual material for constructs that are imported from the integrated resources. The definitions and EXPRESS provided in the integrated resources or application interpreted constructs for constructs used in the MIM may include select list items and subtypes which are not imported into the MIM. Requirements stated in the integrated resources or application interpreted constructs which refer to such items and subtypes apply exclusively to those items which are imported into the MIM.

EXPRESS specification:

```
* )
SCHEMA layer_assignment_mim;

USE FROM foundation_representation_mim; -- ISO 10303-1006

USE FROM presentation_organization_schema -- ISO 10303-46
    (presentation_layer_assignment);
( *
```

NOTE 1 - See annex D for a graphical presentation of this schema using the EXPRESS-G notation.

NOTE 2 - The schemas referenced above can be found in the following parts of ISO 10303:

foundation_representation_mim	ISO 10303-1006
presentation_organization_schema	ISO 10303-46

EXPRESS specification:

```
* )
END_SCHEMA;
( *
```

Annex A

(normative)

MIM short names

Entity names in this part of ISO 10303 have been defined in other parts of ISO 10303. Requirements on the use of the short names are found in the implementation methods included in ISO 10303. The EXPRESS MIM short names are available from the Internet:

<<http://www.mel.nist.gov/div826/subject/apde/snr/>>

Annex B

(normative)

Information object registration

B.1 Document identification

To provide for unambiguous identification of an information object in an open system, the object identifier

{ iso standard 10303 part(1008) version(-1) }

is assigned to this part of ISO 10303. The meaning of this value is defined in ISO/IEC 8824-1, and is described in ISO 10303-1.

B.2 Schema identification

To provide for unambiguous identification of the schema specifications given in this application module in an open information system, the object identifiers are assigned as follows:

{ iso standard 10303 part(1008) version(0) object(1) layer-assignment-arm(1) }

is assigned to the layer_assignment_arm schema.

{ iso standard 10303 part(1008) version(0) object(2) layer-assignment-mim(1) }

is assigned to the layer_assignment_mim schema. The meaning of this value is defined in ISO 8824-1, and is described in ISO 10303-1.

Annex C
(informative)

ARM EXPRESS-G

The following diagrams correspond to the ARM EXPRESS listing given in clause 4. The diagrams use the EXPRESS-G graphical notation for the EXPRESS language. EXPRESS-G is defined in annex D of ISO 10303-11.

NOTE - The inter-page referencing is to the diagram number and not the figure number.

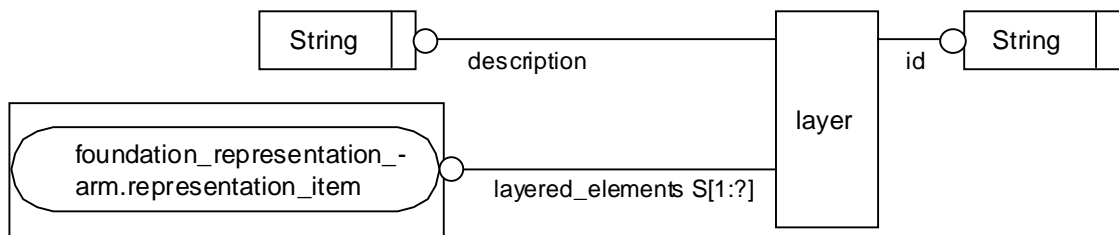


Figure C.1 - ARM EXPRESS-G diagram 1 of 1

Annex D
(informative)

MIM EXPRESS-G

The following diagrams correspond to the MIM EXPRESS expanded listing. The diagrams use the EXPRESS-G graphical notation for the EXPRESS language. EXPRESS-G is defined in annex D of ISO 10303-11.

NOTE - The inter-page referencing is to the diagram number and not the figure number.

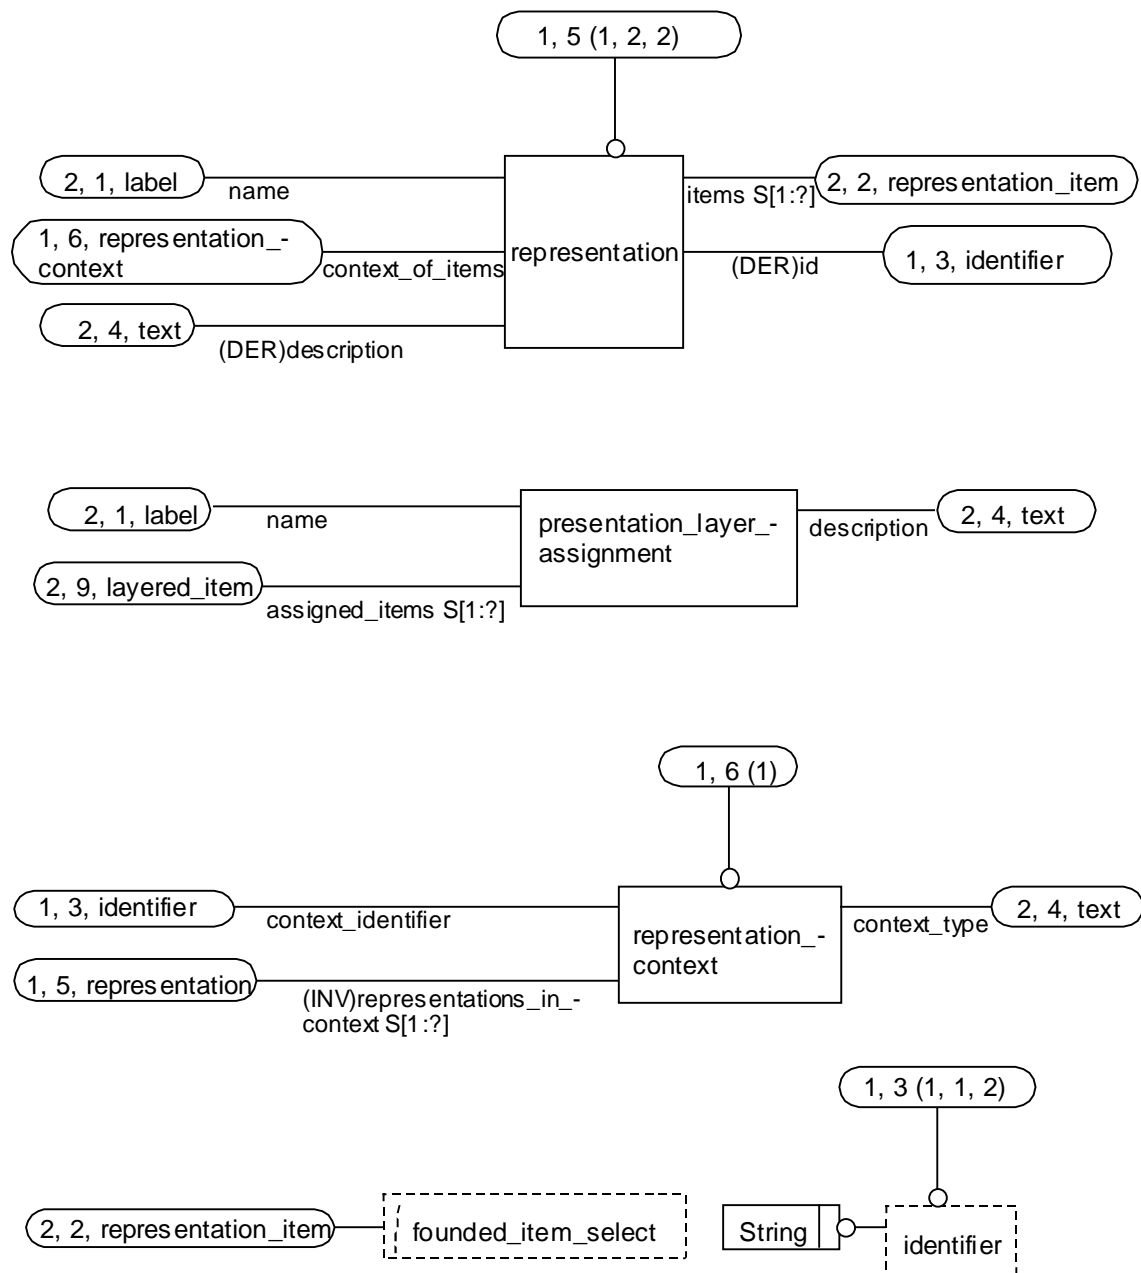


Figure D.1 - MIM EXPRESS-G diagram 1 of 2

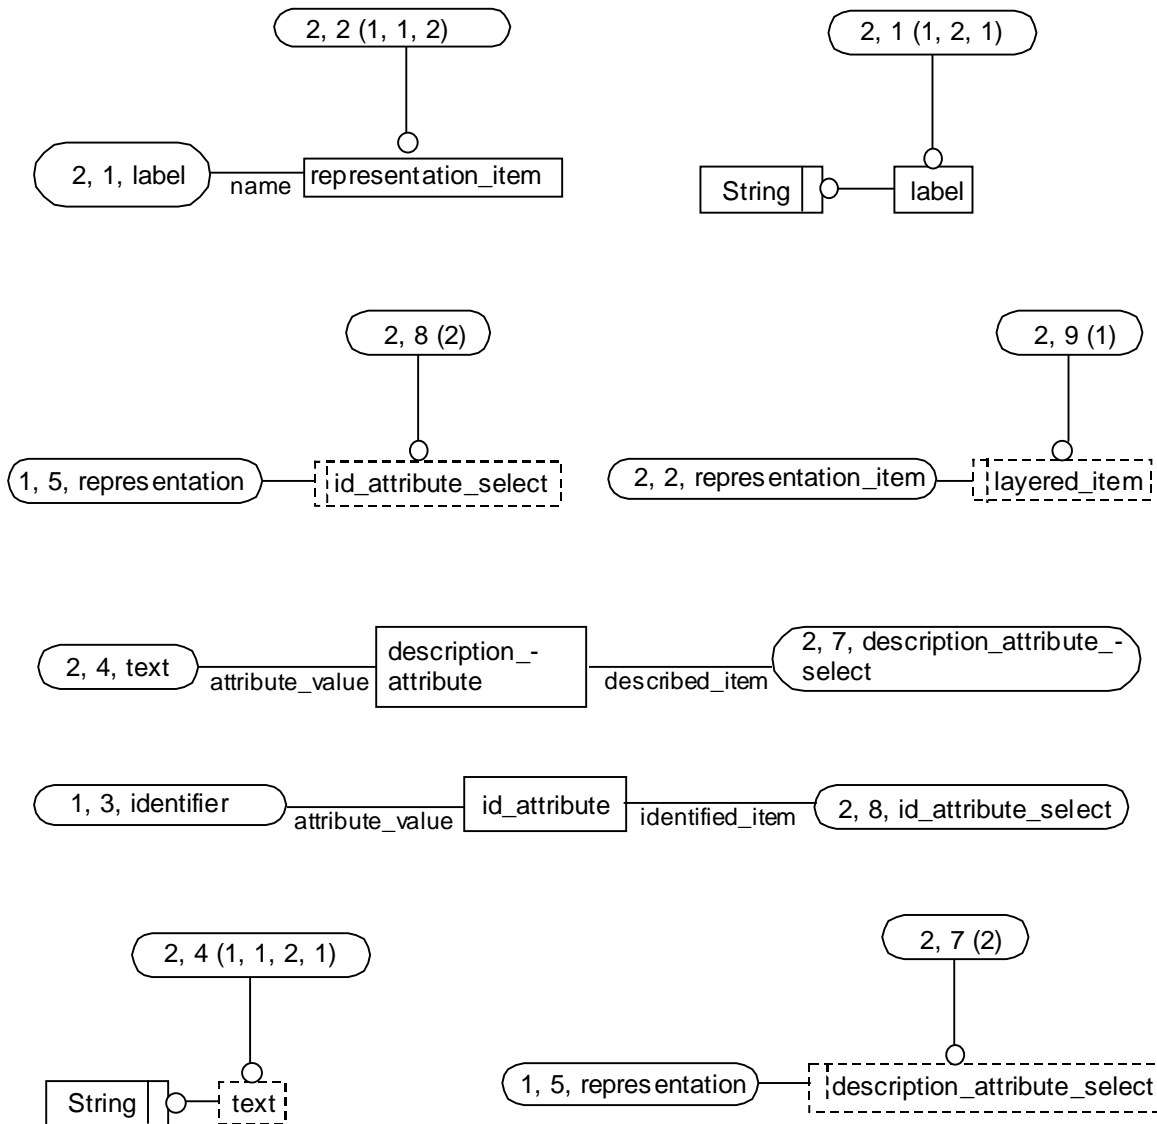


Figure D.2 - MIM EXPRESS-G diagram 2 of 2

Annex E (informative)

AM ARM and MIM EXPRESS

This annex provides a listing of the EXPRESS for the ARM specified in clause 4 and EXPRESS schema specified in 5.2 of this part of ISO 10303 without comments or other explanatory text. The content of this annex is available in computer-interpretable form and can be found at the following URLs:

<http://www.nist.gov/sc4/nwi_pwi/nwi/step/part1008/layer_assignment_arm.exp>

<http://www.nist.gov/sc4/nwi_pwi/nwi/step/part1008/layer_assignment_mim.exp>

Bibliography

- [1] ISO 10303-1001:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Appearance assignment.*
- [2] ISO 10303-1002:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Colour.*
- [3] ISO 10303-1003:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Curve appearance.*
- [4] ISO 10303-1004:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Elemental shape.*
- [5] ISO 10303-1005:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Elemental topological shape.*
- [6] ISO 10303-1006:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Foundation representation*
- [7] ISO 10303-1007:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: General surface appearance.*
- [8] ISO 10303-1009:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Shape appearance and layers.*
- [9] ISO TC 184/SC4 1997, *Proposed Standing Document — Guidelines for application module development, revision 0.6* <<http://wg10step.aticorp.org/Deliverables/Guidelines/AMContent/Draft6/AMConGde06.html> >.

¹⁾ To be published

Index

AM ARM and MIM EXPRESS	16
ARM entity definitions	4
ARM EXPRESS-G	11
description-attribute	
MIM EXPRESS-G	15
id_attribute	
MIM EXPRESS-G	15
information object registration	10
label	
MIM EXPRESS-G	15
layer	
application entity	5
ARM EXPRESS-G	12
mapping table	7
layer assignment	
unit of functionality	4
MIM EXPRESS-G	13
MIM short names of entities	9
presentation_layer_assignment	
mapping table	7
MIM EXPRESS-G	14
referenced AM ARMs	4
representation	
MIM EXPRESS-G	14
representation_context	
MIM EXPRESS -G	14
representation_item	
MIM EXPRESS-G	15